SRS-150

SERVICE MANUAL

US Model
Canadian Model
AEP Model
UK Model
E Model

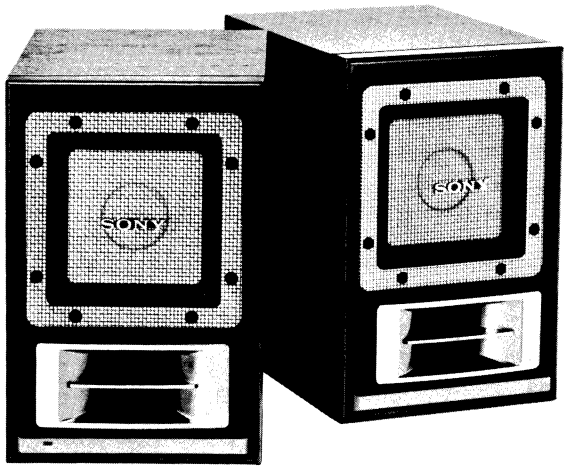

SPECIFICATIONS

Amplifier section

Power output	20 W + 20 W (Peak) 13 W + 13 W (at 10% harmonic distortion)
Input	L-shaped stereo unimatch plug Impedance 100 ohms at 1 kHz

Speaker section

System	Full-range, enclosure type (bass reflex) magnetically shielded design
Speaker unit	Full-range: 106 × 106 mm (4¼ × 4¼ inches)
Nominal inpednace	4 ohms
Power handling capacity	Nominal 20 W + 20 W Maximum 40 W + 40 W

General

Power requirements	UK model: 240 V AC, 50 Hz AEP, E model: 220 V AC, 50/60 Hz US, Canadian model: 120 V AC, 60 Hz DC IN 12 V jack accepts: optional Sony DCC-16A car battery cord for use with 12 V car battery
Dimensions	Approx. 134 × 201 × 190 mm (w/h/d) (5⅜ × 8 × 7½ inches) not incl. projecting parts
Weight	Left speaker: Approx. 3.5 kg (7 lb 12 oz) Right speaker: Approx. 2.1 kg (4 lb 10 oz)

SAFETY-RELATED COMPONENT WARNING!!

COMPONENTS IDENTIFIED BY SHADING AND MARK ⚠ ON THE SCHEMATIC DIAGRAMS AND IN THE PARTS LIST ARE CRITICAL TO SAFE OPERATION. REPLACE THESE COMPONENTS WITH SONY PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL OR IN SUPPLEMENTS PUBLISHED BY SONY.

ATTENTION AU COMPOSANT AYANT RAPPORT À LA SÉCURITÉ!

LES COMPOSANTS IDENTIFIÉS PAR UNE TRAME ET UNE MARQUE ⚠ SUR LES DIAGRAMMES SCHÉMATIQUES ET LA LISTE DES PIÈCES SONT CRITIQUES POUR LA SÉCURITÉ DE FONCTIONNEMENT. NE REMPLACER CES COMPOSANTS QUE PAR DES PIÈCES SONY DONT LES NUMÉROS SONT DONNÉS DANS CE MANUEL OU DANS LES SUPPLÉMENTS PUBLIÉS PAR SONY.

MICROFILM

STEREO ACTIVE SPEAKER SYSTEM

SONY®

AUD

1. MOUNTING DIAGRAM

IC	201	202	203	103	IC201	
Q	101	102			IC101	
D			201		301	302
			101		303	

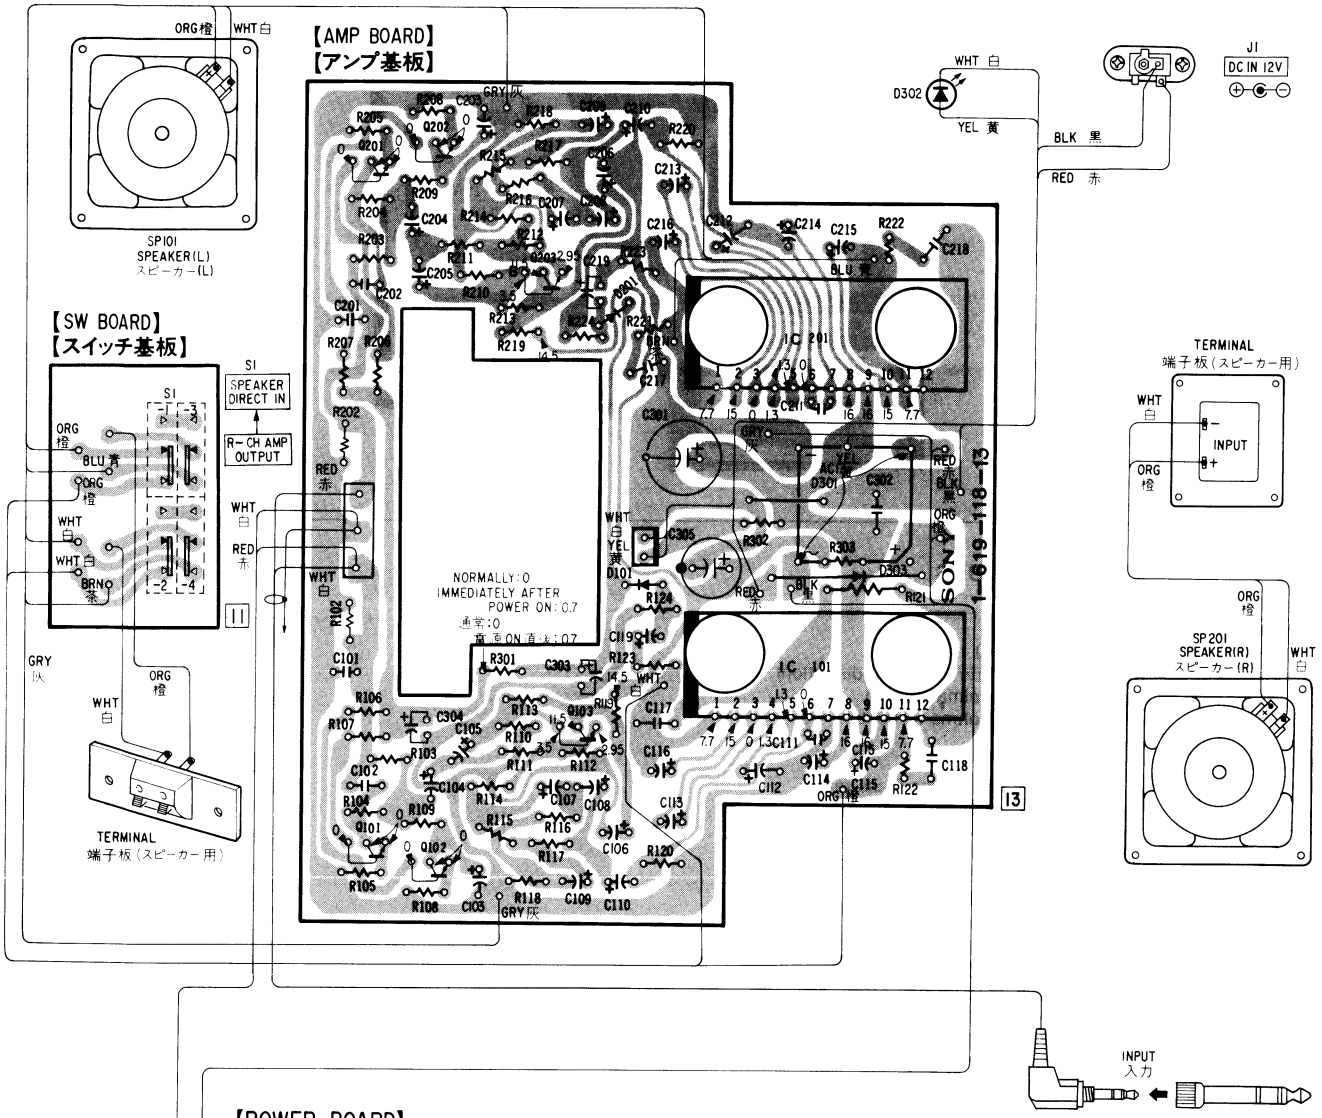

Q	D
405	401
404	
402 403	
401	

Note:

- Color code of sleeving over the end of the jacket.



- ○—: parts extracted from the component side.

2. SCHEMATIC DIAGRAM

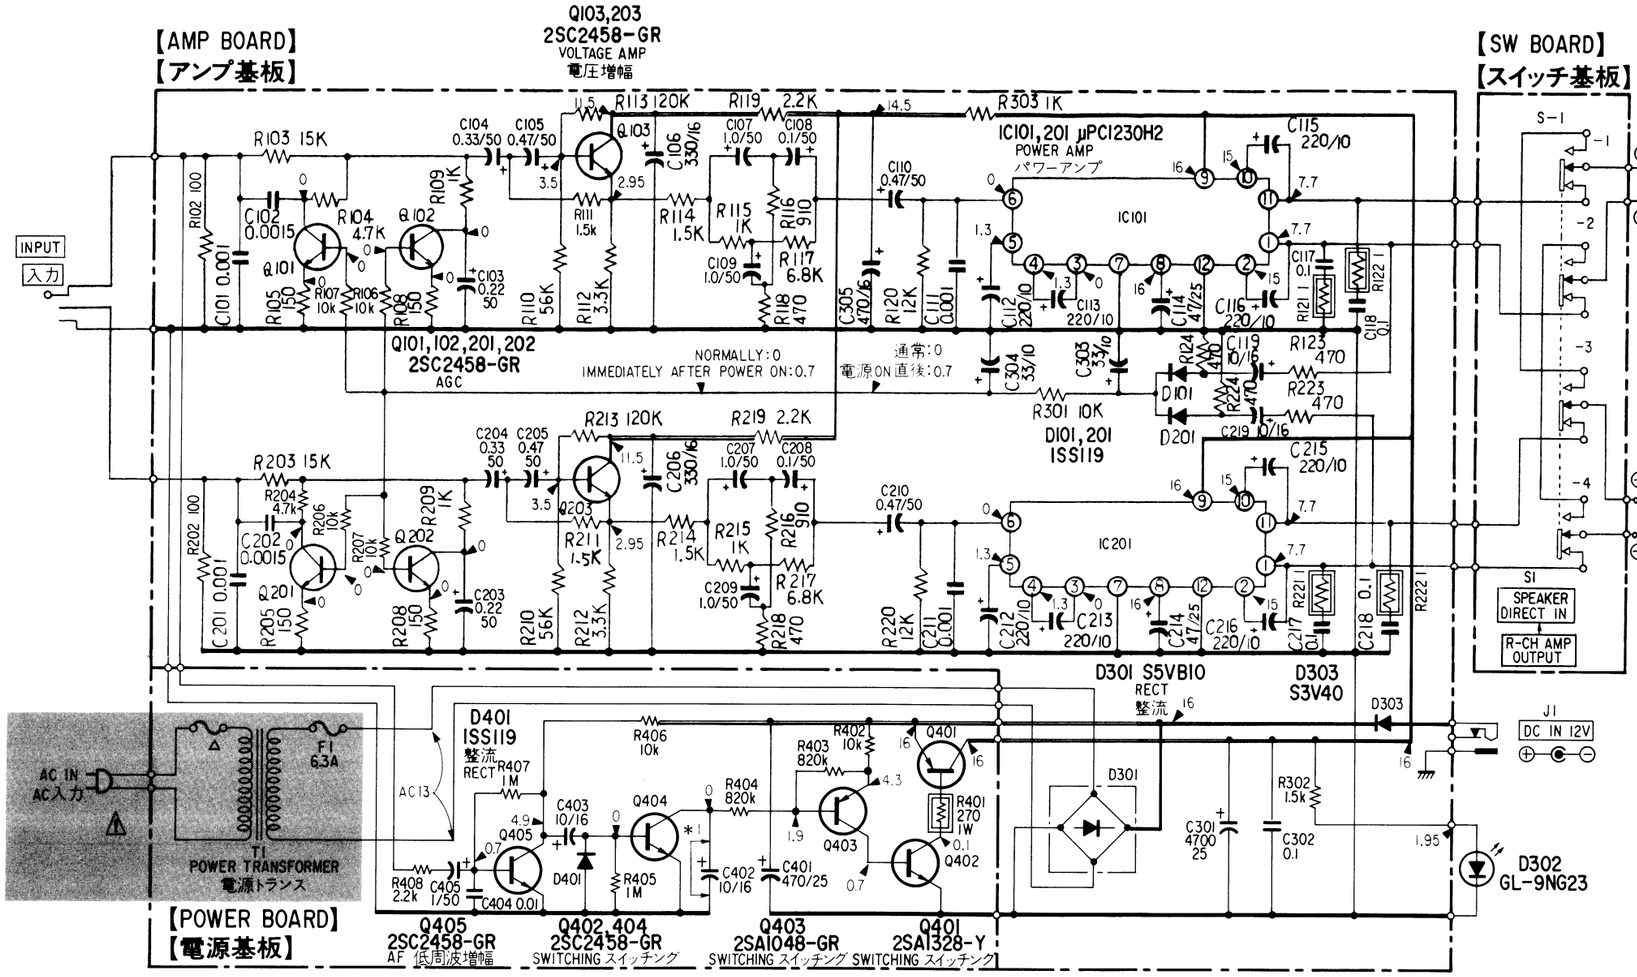

Note:

- All capacitors are in μF unless otherwise noted. pF: μμF 50WV or less are not indicated except for electrolytics and tantalums.
- All resistors are in Ω and 1/4W or less unless otherwised specified.
- △ : internal component.
- ——— : B+ bus.
- Voltages are dc with respect to ground unless otherwise noted.
- Readings are taken under no-signal conditions with a VOM (50kΩ/V).
- Voltage variations may be noted due to normal production tolerances.
  *1:Short C402 to stop AUTO ON/OFF circuit from operating when measuring voltages.
- Switch

Ref. No.	Switch	Position
S1	SPEAKER SW	R-CH AMP OUTPUT

Note: The components identified by shading and mark ⚠ are critical for safety. Replace only with part number specified.

Note: Les composants identifiés par une trame et une marque ⚠ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

- **Note on replacing ext. power supply jack.**

When replacing ext. power supply jack, fill up a clearance with bond as illustrated.

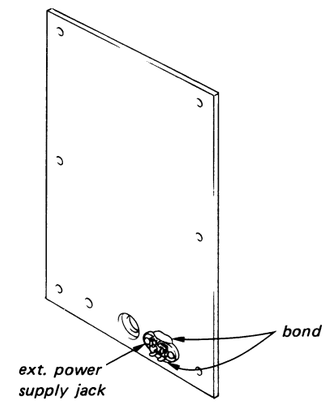

- **Semiconductor Lead Layouts**

1SS119	S5VB10	μPC1230H2	2SC634SP 2SA1048-GR	2SA1328
				

μPC1230H2

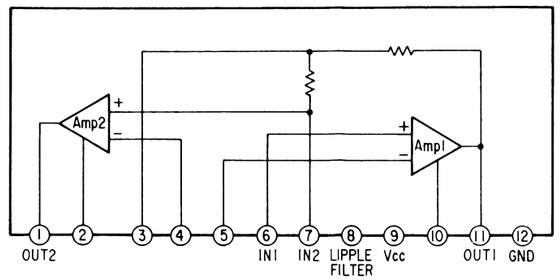

3. EX

NOT
· T
n
s
· I
t
s
p
· T
p
n

No.	P
1	X
2	*3
3	X
4	*3
5	X
6	3
	3
8	3
	3
	3
	3
	3
11	*4
12	*3
13	2
	2
	2
15	X
	X
16	3
17	X
18	3
19	4
20	7
21	2
22	7
23	7
24	4
25	7
26	3

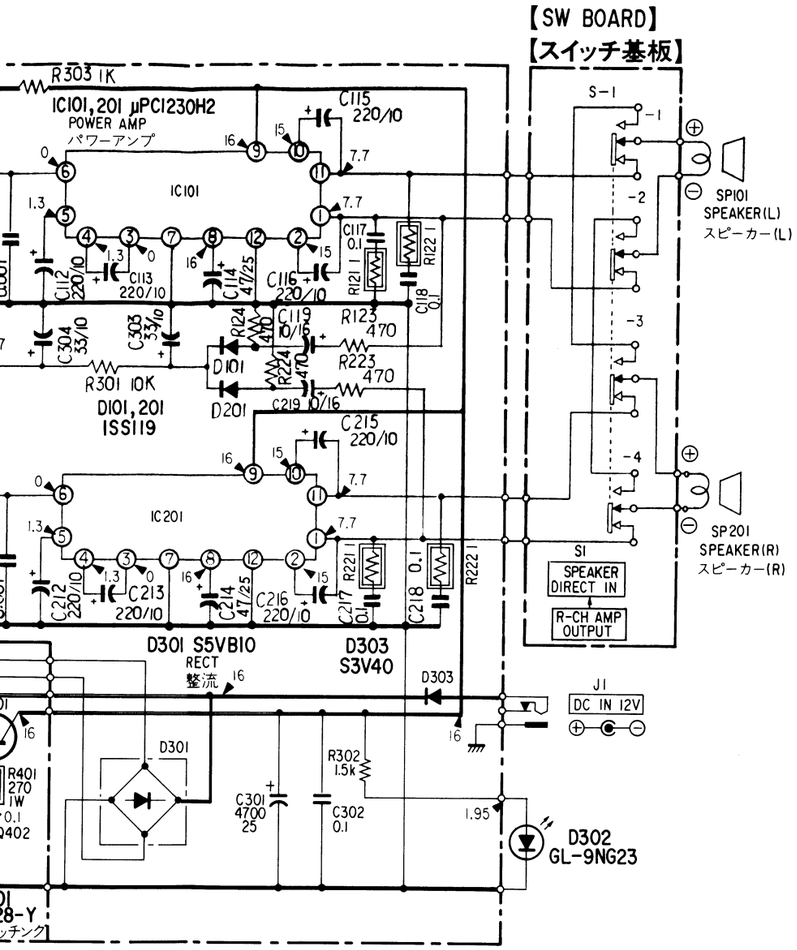

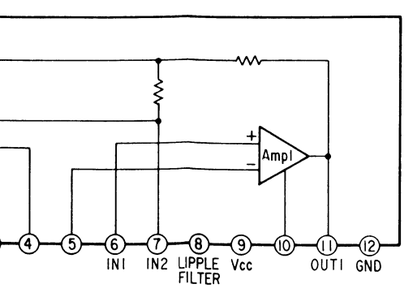

Note:

- All capacitors are in μF unless otherwise noted. pF: μμF 50WV or less are not indicated except for electrolytics and tantalums.
- All resistors are in Ω and 1/4W or less unless otherwised specified.
- △ : internal component.
- ——— : B+ bus.
- Voltages are dc with respect to ground unless otherwise noted.
- Readings are taken under no-signal conditions with a VOM (50 kΩ/V).
- Voltage variations may be noted due to normal production tolerances.
  *1:Short C402 to stop AUTO ON/OFF circuit from operating when measuring voltages.
- Switch

Ref. No.	Switch	Position
S1	SPEAKER SW	R-CH AMP OUTPUT

Note: The components identified by shading and mark ⚠ are critical for safety. Replace only with part number specified.

Note: Les composants identifiés par une trame et une marque ⚠ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

- **Note on replacing ext. power supply jack.**

  When replacing ext. power supply jack, fill up a clearance with bond as illustrated.

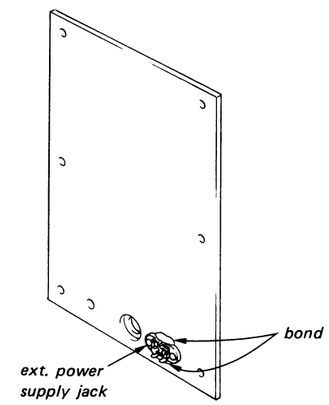

3. EXPLODED VIEW AND PARTS LIST

NOTE:

- The mechanical parts with no reference number in the exploded views are not supplied.
- Items marked " ★ " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- The construction parts of an assembled part are indicated with a collation number in the remark column.

The components identified by shading and mark ⚠ are critical for safety. Replace only with part number specified.

Les composants identifiés par une trame et une marque ⚠ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

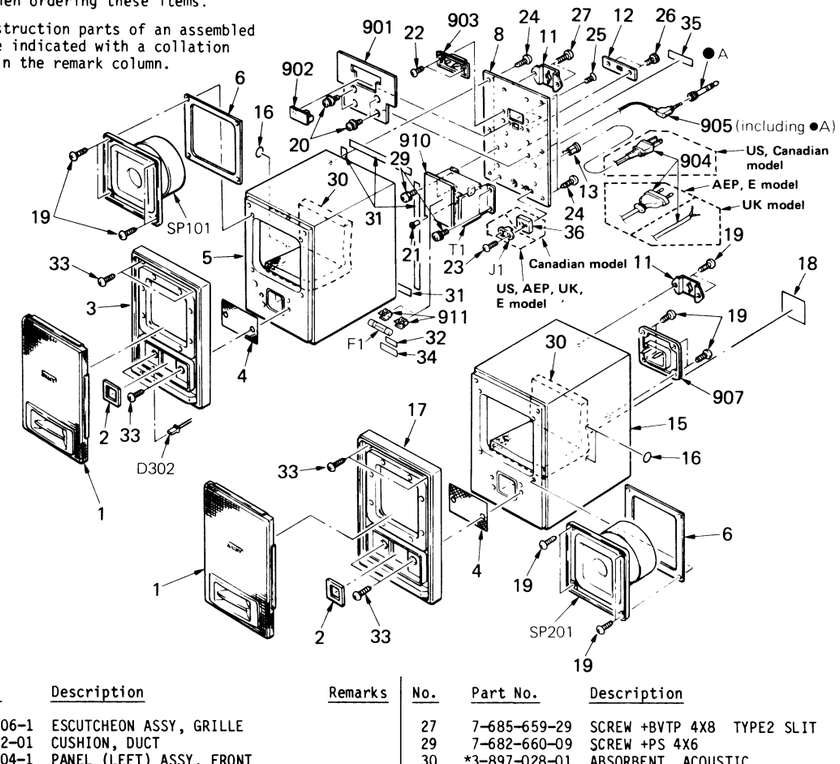

No.	Part No.	Description	Remarks
1	X-3897-006-1	ESCUTCHEON ASSY, GRILLE	
2	*3-897-002-01	CUSHION, DUCT	
3	X-3897-004-1	PANEL (LEFT) ASSY, FRONT	
4	*3-897-006-01	NET, DUCT	
5	X-3897-007-1	CABINET (LEFT) ASSY, SP	
6	3-319-833-01	(Canadian,AEP,UK,E)...CUSHION, WOOFER	
	3-897-029-01	(US).....CUSHION, WOOFER	
8	3-897-014-11	(US).....PANEL, BACK	
	3-897-014-21	(Canadian)...PANEL, BACK	
	3-897-014-31	(AEP).....PANEL, BACK	
	3-897-014-41	(E).....PANEL, BACK	
	3-897-014-51	(UK).....PANEL, BACK	
11	*4-883-959-11	HOOK	
12	*3-897-007-11	PANEL, CAUTION	
13	2-391-455-01	(Canadian)...BUSHING (CM-22C)	
	2-391-456-01	(AEP,UK).....BUSHING (CM-22B)	
	2-392-799-01	(US,E).....BUSHING, CORD	
15	X-3897-003-1	(Canadian,AEP,UK,E) ...CABINET (RIGHT) ASSY, SP	
	X-3897-014-2	(US)....CABINET (RIGHT) ASSY, SP	
16	3-897-010-01	SEAL, BLIND	
17	X-3897-005-1	PANEL (RIGHT) ASSY, FRONT	
18	3-897-030-01	LABEL, MODEL NAME	
19	4-874-614-11	SCREW (4) (3.5X14), TAPPING	
20	7-682-949-09	SCREW +PSW 3X10	
21	2-512-409-11	BUSHING, CABLE	
22	7-685-751-09	SCREW +BVTT 3X6 (S)	
23	7-685-852-09	SCREW +BVTT 2X5 (S)	
24	4-874-614-51	SCREW (4) (3.5X20), TAPPING	
25	7-621-559-30	SCREW +K 2.6X5	
26	3-897-022-01	SCREW, ORNAMENTAL	
27	7-685-659-29	SCREW +BVTP 4X8 TYPE2 SLIT	
29	7-682-660-09	SCREW +PS 4X6	
30	*3-897-028-01	ABSORBENT, ACOUSTIC	
31	3-897-003-02	PACKING, BACK PANEL	
32	3-701-946-28	(US,Canadian)...LABEL, FUSE	
	3-701-948-22	(AEP,UK,E).....LABEL, FUSE	
33	4-874-614-61	SCREW (4) (3.5X16), TAPPING	
34	*3-703-044-26	(US,Canadian)...LABEL, CAUTION	
35	3-703-845-01	(US,Canadian) ...LABEL (N)(U/C), MAIN CAUTION	
36	3-897-031-01	(Canadian)...PLATE	
901	*A-4518-275-A	MOUNTED PCB, AMP	
902	*1-619-119-11	PC BOARD, SWITCH	
903	1-536-833-11	TERMINAL BOARD (SPEAKER)	
904	⚠.1-534-817-XX	(AEP).....CORD, POWER, EULO PLUG	
	⚠.1-551-506-XX	(US).....CORD, POWER	
	⚠.1-551-510-12	(Canadian)...CORD, POWER	
	⚠.1-555-727-00	(UK).....CORD, POWER	
	⚠.1-555-734-00	(E).....CORD, POWER	
905	1-558-605-11	CORD (WITH PLUG)	
907	1-536-832-11	TERMINAL BOARD (SPEAKER)	
910	*1-619-773-11	PC BOARD, POWER	
911	1-533-183-11	HOLDER, FUSE	
D302	8-719-919-25	DIODE GL-9NG23	
F1	⚠.1-532-325-00	(AEP,UK,E).....FUSE, TIME-LAG	
F1	⚠.1-532-748-11	(US,Canadian)...FUSE, GLASS TUBE	
J1	1-507-447-XX	(US,AEP,UK,E)...JACK, EXT. POWER SUPPLY	
T1	⚠.1-448-639-11	(AEP,E).....TRANSFORMER, POWER	
T1	⚠.1-448-653-11	(US,Canadian)...TRANSFORMER, POWER	
T1	⚠.1-448-654-11	(UK).....TRANSFORMER, POWER	

SRS-150 SRS-150

NOTE:
- Items marked " * " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- If there are two or more same circuitsin a set such as a stereophonic machine, only typical circuit parts may be indicated and capacitors and resistors in other same circuits may be omitted.

CAPACITORS:
MF:μF, PF:μμF.

RESISTORS
- All resistors are in ohms.
- F : nonflammable

COILS
- MMH : mH, UH : μH

SEMICONDUCTORS
In each case, U : μ, for example:
UA...: μA..., UPA...: μPA..., UPC...: μPC, UPD...: μPD...

The components identified by shading and mark ⚠ are critical for safety. Replace only with part number specified.

Les composants identifiés par une trame et une marque ⚠ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

ELECTRICAL PARTS

Ref.No.	Part No.	Description			
901	*A-4518-275-A	MOUNTED PCB, AMP			
902	*1-619-119-11	PC BOARD, SWITCH			
903	1-536-833-11	TERMINAL BOARD (SPEAKER)			
904	⚠1-534-817-XX	(AEP).....CORD, POWER, EULO PLUG			
	⚠1-551-506-XX	(US).....CORD, POWER			
	⚠1-551-510-12	(Canadian)...CORD, POWER			
	⚠1-555-727-00	(UK).....CORD, POWER			
	⚠1-555-734-00	(E).....CORD, POWER			
905	1-558-605-11	CORD (WITH PLUG)			
907	1-536-832-11	TERMINAL BOARD (SPEAKER)			
908	*1-508-796-00	PIN, CONNECTOR 2P			
909	*1-535-116-00	TERMINAL			
910	*1-619-773-11	PC BOARD, POWER			
911	1-533-183-11	HOLDER, FUSE			
C101	1-102-074-00	CERAMIC	0.001MF	10%	50V
C102	1-130-473-00	MYLAR	0.0015MF	5%	50V
C103	1-123-608-00	ELECT	0.22MF	20%	50V
C104	1-123-609-00	ELECT	0.33MF	20%	50V
C105	1-123-610-00	ELECT	0.47MF	20%	50V
C106	1-124-119-00	ELECT	330MF	20%	16V
C107	1-123-611-00	ELECT	1MF	20%	50V
C108	1-123-607-00	ELECT	0.1MF	20%	50V
C109	1-123-611-00	ELECT	1MF	20%	50V
C110	1-123-610-00	ELECT	0.47MF	20%	50V
C111	1-102-074-00	CERAMIC	0.001MF	10%	50V
C112	1-124-444-00	ELECT	220MF	20%	10V
C113	1-124-444-00	ELECT	220MF	20%	10V
C114	1-123-332-00	ELECT	47MF	20%	25V
C115	1-124-444-00	ELECT	220MF	20%	10V
C116	1-124-444-00	ELECT	220MF	20%	10V
C117	1-130-495-00	MYLAR	0.1MF	5%	50V
C118	1-130-495-00	MYLAR	0.1MF	5%	50V
C119	1-123-356-00	ELECT	10MF	20%	16V
C201	1-102-074-00	CERAMIC	0.001MF	10%	50V
C202	1-130-473-00	MYLAR	0.0015MF	5%	50V
C203	1-123-608-00	ELECT	0.22MF	20%	50V
C204	1-123-609-00	ELECT	0.33MF	20%	50V
C205	1-123-610-00	ELECT	0.47MF	20%	50V
C206	1-124-119-00	ELECT	330MF	20%	16V
C207	1-123-611-00	ELECT	1MF	20%	50V
C208	1-123-607-00	ELECT	0.1MF	20%	50V
C209	1-123-611-00	ELECT	1MF	20%	50V
C210	1-123-610-00	ELECT	0.47MF	20%	50V
C211	1-102-074-00	CERAMIC	0.001MF	10%	50V
C212	1-124-444-00	ELECT	220MF	20%	10V
C213	1-124-444-00	ELECT	220MF	20%	10V
C214	1-123-332-00	ELECT	47MF	20%	25V

ELECTRICAL PARTS

Ref.No.	Part No.	Description			
C215	1-124-444-00	ELECT	220MF	20%	10V
C216	1-124-444-00	ELECT	220MF	20%	10V
C217	1-130-495-00	MYLAR	0.1MF	5%	50V
C218	1-130-495-00	MYLAR	0.1MF	5%	50V
C219	1-123-356-00	ELECT	10MF	20%	16V
C301	1-124-564-11	ELECT	4700MF	20%	25V
C302	1-162-561-11	CERAMIC	0.1MF		16V
C303	1-123-645-00	ELECT	33MF	20%	10V
C304	1-123-645-00	ELECT	33MF	20%	10V
C305	1-124-475-11	ELECT	470MF	20%	16V
C401	1-124-480-11	ELECT	470MF	20%	25V
C402	1-123-356-00	ELECT	10MF	20%	16V
C403	1-123-356-00	ELECT	10MF	20%	16V
C404	1-130-483-00	MYLAR	0.01MF	5%	50V
C405	1-123-611-00	ELECT	1MF	20%	50V
D101	8-719-911-19	DIODE 1SS119			
D201	8-719-911-19	DIODE 1SS119			
D301	8-719-505-20	DIODE S5VB10			
D302	8-719-919-25	DIODE GL-9NG23			
D303	8-719-503-40	DIODE S3VB40			
D401	8-719-911-19	DIODE 1SS119			
F1	⚠1-532-325-00	(AEP,UK,E).....FUSE, TIME-LAG			
F1	⚠1-532-748-11	(US,Canadian)...FUSE, GLASS TUBE			
IC101	8-759-105-66	IC UPC1230H2			
IC201	8-759-105-66	IC UPC1230H2			
J1	1-507-447-XX	(US,AEP,UK,E)...JACK, EXT. POWER SUPPLY			
Q101	8-729-600-27	TRANSISTOR 2SC634SP			
Q102	8-729-600-27	TRANSISTOR 2SC634SP			
Q103	8-729-600-27	TRANSISTOR 2SC634SP			
Q201	8-729-600-27	TRANSISTOR 2SC634SP			
Q202	8-729-600-27	TRANSISTOR 2SC634SP			
Q203	8-729-600-27	TRANSISTOR 2SC634SP			
Q401	8-729-201-86	TRANSISTOR 2SA1328			
Q402	8-729-600-27	TRANSISTOR 2SC634SP			
Q403	8-729-204-83	TRANSISTOR 2SA1048-GR			
Q404	8-729-600-27	TRANSISTOR 2SC634SP			
Q405	8-729-600-27	TRANSISTOR 2SC634SP			
R102	1-249-405-11	CARBON	100	5%	1/6W
R103	1-247-859-00	CARBON	15K	5%	1/6W
R104	1-249-425-11	CARBON	4.7K	5%	1/6W
R105	1-247-811-00	CARBON	150	5%	1/6W
R106	1-249-429-11	CARBON	10K	5%	1/6W
R107	1-249-429-11	CARBON	10K	5%	1/6W
R108	1-247-811-00	CARBON	150	5%	1/6W
R109	1-249-417-11	CARBON	1K	5%	1/6W
R110	1-247-873-00	CARBON	56K	5%	1/6W

ELECTRICAL PARTS

Ref.No.	Part No.	Description				
R111	1-249-419-11	CARBON	1.5K	5%	1/6W	
R112	1-249-423-11	CARBON	3.3K	5%	1/6W	
R113	1-247-881-00	CARBON	120K	5%	1/6W	
R114	1-249-419-11	CARBON	1.5K	5%	1/6W	
R115	1-249-417-11	CARBON	1K	5%	1/6W	
R116	1-247-830-00	CARBON	910	5%	1/6W	
R117	1-247-851-00	CARBON	6.8K	5%	1/6W	
R118	1-247-823-00	CARBON	470	5%	1/6W	
R119	1-249-421-11	CARBON	2.2K	5%	1/6W	
R120	1-247-857-00	CARBON	12K	5%	1/6W	
R121	1-249-381-11	CARBON	1	5%	1/6W	F
R122	1-249-381-11	CARBON	1	5%	1/6W	F
R123	1-247-823-00	CARBON	470	5%	1/6W	
R124	1-247-823-00	CARBON	470	5%	1/6W	
R202	1-249-405-11	CARBON	100	5%	1/6W	
R203	1-247-859-00	CARBON	15K	5%	1/6W	
R204	1-249-425-11	CARBON	4.7K	5%	1/6W	
R205	1-247-811-00	CARBON	150	5%	1/6W	
R206	1-249-429-11	CARBON	10K	5%	1/6W	
R207	1-249-429-11	CARBON	10K	5%	1/6W	
R208	1-247-811-00	CARBON	150	5%	1/6W	
R209	1-249-417-11	CARBON	1K	5%	1/6W	
R210	1-247-873-00	CARBON	56K	5%	1/6W	
R211	1-249-419-11	CARBON	1.5K	5%	1/6W	
R212	1-249-423-11	CARBON	3.3K	5%	1/6W	
R213	1-247-881-00	CARBON	120K	5%	1/6W	
R214	1-249-419-11	CARBON	1.5K	5%	1/6W	
R215	1-249-417-11	CARBON	1K	5%	1/6W	
R216	1-247-830-00	CARBON	910	5%	1/6W	
R217	1-247-851-00	CARBON	6.8K	5%	1/6W	
R218	1-247-823-00	CARBON	470	5%	1/6W	
R219	1-249-421-11	CARBON	2.2K	5%	1/6W	
R220	1-247-857-00	CARBON	12K	5%	1/6W	
R221	1-249-381-11	CARBON	1	5%	1/6W	F
R222	1-249-381-11	CARBON	1	5%	1/6W	F
R223	1-247-823-00	CARBON	470	5%	1/6W	
R224	1-247-823-00	CARBON	470	5%	1/6W	
R301	1-249-429-11	CARBON	10K	5%	1/6W	
R302	1-249-419-11	CARBON	1.5K	5%	1/6W	
R303	1-249-417-11	CARBON	1K	5%	1/6W	
R401	1-216-429-00	METAL OXIDE	270	5%	1W	F
R402	1-249-429-11	CARBON	10K	5%	1/6W	
R403	1-247-901-00	CARBON	820K	5%	1/6W	
R404	1-247-901-00	CARBON	820K	5%	1/6W	
R405	1-247-903-00	CARBON	1M	5%	1/6W	

ELECTRICAL PARTS

Ref.No.	Part No.	Description				
R406	1-249-429-11	CARBON	10K	5%	1/6W	
R407	1-247-903-00	CARBON	1M	5%	1/6W	
R408	1-249-421-11	CARBON	2.2K	5%	1/6W	
S1	1-552-575-00	SWITCH, SLIDE				
SP101	1-503-648-11	SPEAKER (070A019)				
SP201	1-503-648-11	SPEAKER (070A019)				
T1	⚠1-448-639-11	(AEP,E).....TRANSFORMER, POWER				
T1	⚠1-448-653-11	(US,Canadian)...TRANSFORMER, POWER				
T1	⚠1-448-654-11	(UK).....TRANSFORMER, POWER				

ACCESSORY & PACKING MATERIAL

Part No.	Description
1-557-875-21	(Canadian,AEP,UK,E)... CORD, SPEAKER CONNECTION
1-558-848-11	(US)...CORD, SPEAKER CONNECTION
3-703-710-01	STICKER, SONY SYMBOL (12)
3-765-300-11	(AEP,UK,E).....MANUAL, INSTRUCTION
3-765-300-21	(US,Canadian)...MANUAL, INSTRUCTION
3-765-300-31	(Canadian).....MANUAL, INSTRUCTION
3-882-215-00	FOOT, FELT
*3-897-010-11	SEAL, BLIND
3-897-025-01	SHEET, PROTECTION
3-897-026-01	CUSHION (B)
3-897-027-01	CUSHION (F)
3-897-032-01	INDIVIDUAL CARTON
7-621-846-70	SCREW, WOOD +R 4.1X32

The components identified by shading and mark ⚠ are critical for safety. Replace only with part number specified.

Les composants identifiés par une trame et une marque ⚠ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

ELECTRICAL PARTS

Ref.No.	Part No.	Description				
R111	1-249-419-11	CARBON	1.5K	5%	1/6W	
R112	1-249-423-11	CARBON	3.3K	5%	1/6W	
R113	1-247-881-00	CARBON	120K	5%	1/6W	
R114	1-249-419-11	CARBON	1.5K	5%	1/6W	
R115	1-249-417-11	CARBON	1K	5%	1/6W	
R116	1-247-830-00	CARBON	910	5%	1/6W	
R117	1-247-851-00	CARBON	6.8K	5%	1/6W	
R118	1-247-823-00	CARBON	470	5%	1/6W	
R119	1-249-421-11	CARBON	2.2K	5%	1/6W	
R120	1-247-857-00	CARBON	12K	5%	1/6W	
R121	1-249-381-11	CARBON	1	5%	1/6W	F
R122	1-249-381-11	CARBON	1	5%	1/6W	F
R123	1-247-823-00	CARBON	470	5%	1/6W	
R124	1-247-823-00	CARBON	470	5%	1/6W	
R202	1-249-405-11	CARBON	100	5%	1/6W	
R203	1-247-859-00	CARBON	15K	5%	1/6W	
R204	1-249-425-11	CARBON	4.7K	5%	1/6W	
R205	1-247-811-00	CARBON	150	5%	1/6W	
R206	1-249-429-11	CARBON	10K	5%	1/6W	
R207	1-249-429-11	CARBON	10K	5%	1/6W	
R208	1-247-811-00	CARBON	150	5%	1/6W	
R209	1-249-417-11	CARBON	1K	5%	1/6W	
R210	1-247-873-00	CARBON	56K	5%	1/6W	
R211	1-249-419-11	CARBON	1.5K	5%	1/6W	
R212	1-249-423-11	CARBON	3.3K	5%	1/6W	
R213	1-247-881-00	CARBON	120K	5%	1/6W	
R214	1-249-419-11	CARBON	1.5K	5%	1/6W	
R215	1-249-417-11	CARBON	1K	5%	1/6W	
R216	1-247-830-00	CARBON	910	5%	1/6W	
R217	1-247-851-00	CARBON	6.8K	5%	1/6W	
R218	1-247-823-00	CARBON	470	5%	1/6W	
R219	1-249-421-11	CARBON	2.2K	5%	1/6W	
R220	1-247-857-00	CARBON	12K	5%	1/6W	
R221	1-249-381-11	CARBON	1	5%	1/6W	F
R222	1-249-381-11	CARBON	1	5%	1/6W	F
R223	1-247-823-00	CARBON	470	5%	1/6W	
R224	1-247-823-00	CARBON	470	5%	1/6W	
R301	1-249-429-11	CARBON	10K	5%	1/6W	
R302	1-249-419-11	CARBON	1.5K	5%	1/6W	
R303	1-249-417-11	CARBON	1K	5%	1/6W	
R401	1-216-429-00	METAL OXIDE	270	5%	1W	F
R402	1-249-429-11	CARBON	10K	5%	1/6W	
R403	1-247-901-00	CARBON	820K	5%	1/6W	
R404	1-247-901-00	CARBON	820K	5%	1/6W	
R405	1-247-903-00	CARBON	1M	5%	1/6W	

ELECTRICAL PARTS

Ref.No.	Part No.	Description			
R406	1-249-429-11	CARBON	10K	5%	1/6W
R407	1-247-903-00	CARBON	1M	5%	1/6W
R408	1-249-421-11	CARBON	2.2K	5%	1/6W
S1	1-552-575-00	SWITCH, SLIDE			
SP101	1-503-648-11	SPEAKER (070A019)			
SP201	1-503-648-11	SPEAKER (070A019)			
T1	⚠1-448-639-11	(AEP,E).....TRANSFORMER, POWER			
T1	⚠1-448-693-11	(US,Canadian)...TRANSFORMER, POWER			
T1	⚠1-448-654-11	(UK).....TRANSFORMER, POWER			

ACCESSORY & PACKING MATERIAL

Part No.	Description
1-557-875-21	(Canadian,AEP,UK,E)... CORD, SPEAKER CONNECTION
1-558-848-11	(US)...CORD, SPEAKER CONNECTION
3-703-710-01	STICKER, SONY SYMBOL (12)
3-765-300-11	(AEP,UK,E).....MANUAL, INSTRUCTION
3-765-300-21	(US,Canadian)...MANUAL, INSTRUCTION
3-765-300-31	(Canadian).....MANUAL, INSTRUCTION
3-882-215-00	FOOT, FELT
*3-897-010-11	SEAL, BLIND
3-897-025-01	SHEET, PROTECTION
3-897-026-01	CUSHION (B)
3-897-027-01	CUSHION (F)
3-897-032-01	INDIVIDUAL CARTON
7-621-846-70	SCREW, WOOD +R 4.1X32

The components identified by shading and mark ⚠ are critical for safety. Replace only with part number specified.

Les composants identifiés par une trame et une marque ⚠ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

9-952-200-11

English
86H0681-1
Printed in Japan
© 1986